
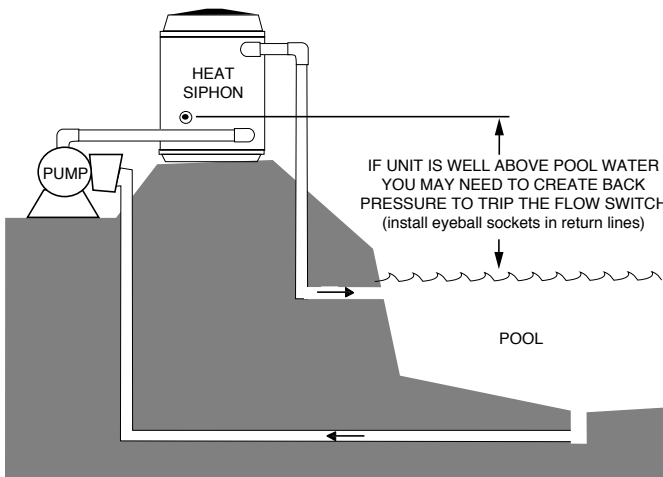


HEAT SIPHON® Installer

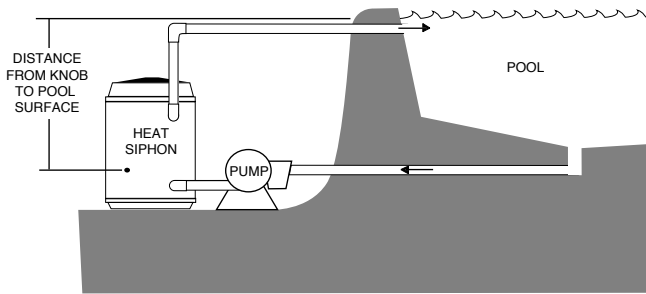

Heat Siphon's exclusive FULL FLOW Titanium heat exchanger has a minimal pressure drop and requires NO SPECIAL PLUMBING arrangement. It should be considered as just another length of PVC pipe in your pool filtration system.

LOCATION: Connect Heat Siphon® in the pool pump discharge (return) line DOWNSTREAM of all filters and pool pumps, and UPSTREAM of any electrator chlorinators or chemical pumps.

SIZE: All Heat Siphon®'s have 1.5" x 2" fittings for connection to the pool or spa filtration piping which will accept 1.5" schedule 40 PVC pipe directly or 2" SCH 40 PVC pipe with a 2" PVC coupling. The in-line water pressure drop produced by Heat Siphon is less than 1.5 psi at 30 GPM.